

An underwater photograph showing a group of dolphins swimming in clear blue water. Sunlight rays penetrate the surface from the top left, creating a bright, shimmering effect. In the bottom left corner, a coral reef is visible. The overall mood is serene and deep.

2020

Taking
Innovation
to New
Depths

highblue®
THE BRIGHTER IDEA

C O N T E N T

AL250	P.72	Camera Arms	P.90	Gloves, Hoods & Handles	P.85	TL3500P Supreme	P.56
AL450WMTail	P.70	Camera Clips & Accessories	P.90	HL450N	P.77	TL4800P	P.54
AL450NMTail	P.71	Camera Trays	P.82	HL450XW	P.77	TL4800P Backmount / Sidemount	P.52
ALI100RAFO II	P.69	Camera Filters	P.79	HLI000N	P.76	TL8000P	P.50
ALI200NP II	P.66	CB6500P	P.40	HLI000XW	P.76	VL4200P	P.32
ALI200NP IR	P.19	CB6500PB	P.14	Light Filters	P.86	VL4200PB	P.16
ALI200WVP II	P.67	CB10000P	P.38	Light Head	P.59	VL8000P Tri Color	P.30
ALI200WVP IR	P.19	CB10000PRC	P.8	Outdoor Dry Bags	P.88	VL10000P	P.28
ALI200XWP II	P.68	CB15000P	P.36	Optical Fibre	P.85	VL10000PB	P.12
ALI200NP Tail II	P.64	CB30000P	P.34	Protective Case Series	P.78	VL10000PRC	P.6
ALI200WVP Tail II	P.65	CF450 II	P.75	RGB White II	P.63	VL15000P Pro Mini	P.26
AL2600XWPB	P.18	CFI200P II	P.74	Red Spot Light & Green Spot Light	P.78	VL15000PB	P.10
ALI800NP	P.62	Chargers	P.84	Snoots	P.86	VL15000PRC	P.2
ALI800P Tri Color II	P.61	Combo Packs	P.80	Spring Cord	P.87	VL15000P Pro Mini Tri Color	P.24
AL2600XWP II	P.60	Controller	P.85	TL2600P	P.58	VL33000P II	P.22
Ambient Filters	P.85	Easy Clip Lights	P.73	TL3500P	P.57	VL60000P	P.20
Batteries	P.84	Easy Release Mount Series	P.88			VTL2600P	P.49
		Float Arms, Flexi Arms	P.89			VTL3800P	P.48
		Fluorodive Kits	P.79			VTL8000P	P.46
						VTL8000P Max	P.42
						VTL8000P Backmount / Sidemount	P.44

VL15000^{PRC}

Li ion Rechargeable Battery Super Power
LED Video Light with Remote Control Option



**15000
LUMENS**
Angle of light beam
160° wide beam



SPECIFICATIONS

Light source	24 x XML LED + 8 x XPE Red LED
Light output	1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I 8650x7
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 142.5mm
Weight in air	774 g (including battery)
Buoyancy in seawater	-291 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



BATCELL I 8650x7
Li ion Rechargeable
Battery



Battery level
indicator built-in:
Blue color /
Green color / Red
color / Flash Red
color



Built-in red color
led enhances
focusing
performance



4 levels of brightness
I level of brightness
of Red color mode
and SOS controlled
by a reliable push
button design



24pcs XML LED
to provide
15000 lumens



Comes with
ball joint for
easy system
setup



Place to insert
the optical
fibre.



Ergonomic
aluminum handle
comes in a
package



Comes with
protective case
for VL 15000 PRC.



FILFLUORO I 5000
Fluorodive filter for
VL 15000 PRC.
Sold separately.



Optical fibre.
Sold separately.



Controller kit set.
Sold separately.



Set-up for the
Controller.

CB15000_{PRC}

Li ion Rechargeable Battery Super Power
LED Video Light with High Color Rendering
Index with Remote Control Option



**15000
LUMENS**
Angle of light beam
160° wide beam



SPECIFICATIONS

Light source	COB LED + 8 x XPE Red LED
Light output	1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 142.5mm
Weight in air	787 g (including battery)
Buoyancy in seawater	-304 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



BATCELL I8650x7
Li ion Rechargeable
Battery



Battery level
indicator built-in:
Blue color /
Green color / Red
color / Flash Red
color



Built-in red color
led enhances
focusing
performance



4 levels of brightness
I level of brightness
of Red color mode
and SOS controlled
by a reliable push
button design



COB LED
to provide
15000 lumens



Comes with
ball joint for
easy system
setup



Place to insert
the optical fibre.



Ergonomic
aluminum handle
comes in a
package



Comes with
protective case
for CB 15000PRC.



FILFLUORO I5000
Fluorodive filter for
CB 15000PRC.
Sold separately.



Optical fibre.
Sold separately.



Controller kit set.
Sold separately.



Set-up for the
Controller.

VL10000_{PRC}

Li ion Rechargeable Battery High Power
LED Video Light with Remote Control Option



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output	1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2.5 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 25 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	467 g (including battery)
Buoyancy in seawater	-184 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level
indicator built-in:
Blue color /
Green color /
Red color /
Flash Red color



BATCELL18650x4
Li ion Rechargeable
Battery



Built-in red color
led enhances
focusing
performance



Comes with ball
joint for easy
system setup



Place to insert
the optical fibre.



Removable
yellow filter
enhances
warmer color
tone



Sturdy glove
for hands-free
operation
underwater



Comes with
random color
outdoor dry bag



Optical fibre.
Sold separately.



Controller kit set.
Sold separately.



Set-up for the
Controller.

CB10000PRC

Li ion Rechargeable Battery High Power
LED Video Light with High Color Rendering
Index with Remote Control Option



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 140.6mm
Weight in air	679 g (including battery)
Buoyancy in seawater	-283g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level
indicator built-in:
Blue color /
Green color /
Red color /
Flash Red color



BATCELL21700x4
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



Comes with ball
joint for easy system
setup



Place to insert
the optical fibre.



Snoot connector for
CB 10000PRC.
Sold separately.



Sturdy glove for
hands-free operation
underwater



Comes with random
color outdoor dry
bag



Optical fibre.
Sold separately.



Controller kit set.
Sold separately.



Set-up for the
Controller.

VL15000PB

Li ion Rechargeable Battery Super Power LED Video Light with Blue Light



SPECIFICATIONS

Light source	24 x XML LED + 8 x XPE Red LED + 14 x XPE Blue LED
Light output	3750 Lm (level I), 7500 Lm (level II), 15000 Lm (level III)
Light output (Red color mode)	1000 Lm
Light output (Blue color mode)	113 Lm (level I), 225 Lm (level II), 450 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	757 g (including battery)
Buoyancy in seawater	-298 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

15000 LUMENS
Angle of light beam
160° wide beam



3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650x7 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.



24pcs XML LED to provide 15000 lumens



Comes with ball joint for easy system setup



Ergonomic aluminum handle comes in a package



Comes with protective case for VL 15000PB.



Comes with yellow plate.

VL10000PB

Li ion Rechargeable Battery High Power
LED Video Light with Blue Light



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED + 8 x XPE Blue LED
Light output	2500 Lm (level I), 5000 Lm (level II), 10000 Lm (level III)
Light output (Red color mode)	500 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2.5 hrs (level III), 5 hrs (level II) and 10 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457 g (including battery)
Buoyancy in seawater	-173 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included



3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design




Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL I8650x4
Li ion Rechargeable
Battery



Built-in red color
led enhances
focusing
performance



Built-in blue color
led for fluorodiving
performance. Go
with yellow plate
for better result.



Removable yellow
filter enhances
warmer color tone



Sturdy glove for
hands-free
operation
underwater



Comes with
ball joint for
easy system
setup



Comes with random
color outdoor dry
bag



Comes with yellow
plate.

CB6500PB

Li ion Rechargeable Battery High Power LED Video Light with High Color Rendering Index with Blue Light



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED + 8 x XPE Blue LED
Light output	1625 Lm (level I), 3250 Lm (level II), 6500 Lm (level III)
Light output (Red color mode)	500 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	653g (including battery)
Buoyancy in seawater	-272g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included



3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design




Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 21700x4 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.



Snoot 63

Snoot connector for CB6500PB. Sold separately.



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



Comes with random color outdoor dry bag



Comes with yellow plate.

VL4200_{PB}

Li ion Rechargeable Battery LED
Video Light with Blue Light



SPECIFICATIONS

Light source	6 x XML LED + 4 x XPE Red LED + 4 x XPE Blue LED
Light output	1050 Lm (level I), 2100 Lm (level II) 4200 Lm (level III)
Light output (Red color mode)	200 Lm
Light output (Blue color mode)	30 Lm (level I), 60 Lm (level II) 120 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level III), 3 hrs (level II) and 6 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 121.1 mm
Weight in air	318 g (including battery)
Buoyancy in seawater	-167 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included



3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design




Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 32650 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



Removable yellow filter enhances warmer color tone



Comes with random color outdoor dry bag



Comes with yellow plate.

BLUE LIGHT SERIES

BLACK MOLLY VB AL2600XWPB



Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.



Comes with yellow plate.



Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 26650 Li ion Rechargeable Battery



Protective case for AL 2600XWPB and Single Arm Tray. Sold separately.



3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design



Removable yellow filter enhances warmer color tone



Comes with ball joint for easy system setup



Protective case for AL 2600XWPB. Sold separately.



Comes with random color outdoor dry bag

SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED + 2 x XPE Blue LED
Light output	650 Lm (level I), 1300 Lm (level II), 2600Lm (level III)
Light output (Red color mode)	150 Lm
Light output (Blue color mode)	15 Lm (level I), 30 Lm (level II), 60 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 26650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8mm
Weight in air	218g (including battery)
Buoyancy in seawater	-105g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

INFRARED SERIES

AL1200NP IR



940nm IR

SPECIFICATIONS

Light source	IR (940nm)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 33.2 x L. 139.8 mm
Weight in air	168 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 levels of brightness, and SOS controlled by a reliable push button design



BATCELL 18650 Li ion Rechargeable Battery



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color

AL1200WP IR



Comes with random color outdoor dry bag

SPECIFICATIONS

Light source	IR (940nm)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



VL60000P

Li ion Rechargeable Battery
Huge Power LED Video Light



SPECIFICATIONS

Light source	72 x XML LED + 20 x XPE Red LED
Light output	6000 Lm (level I), 15000 Lm (level II) 30000 Lm (level III), 60000 Lm (level IV)
Light output (Red color mode)	2000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 2xBATCELL60000
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 120 x L. 240 mm
Weight in air	3766g (including battery)
Buoyancy in seawater	-1107g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

The Most
Brightness
**60000
LUMENS**
Angle of light beam
160°



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



2xBATCELL60000
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



4 levels of brightness, 1 level of
brightness of Red color mode and
SOS controlled by a reliable push
button design.

Press two keys at the same time to
come up 100%, 50%, 25%, 10% four
power level setting.



Easy to charge up
the battery pack
BATCELL60000



72pcs XML LED to
provide 60000
lumens



Comes with ball joint
for easy system setup



Make use of double
clip and single arm
to make the handle.
Comes in a package.



Comes with
protective case
for VL 60000P.

VL33000P II

Li ion Rechargeable Battery
Ultra Power LED Video Light



SPECIFICATIONS

Light source	45 x XML LED + 10 x XPE Red LED
Light output	3300 Lm (level I), 8250 Lm (level II) 16500 Lm (level III), 33000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x8
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 85 x L. 144.6mm
Weight in air	1391g (including battery)
Buoyancy in seawater	-597g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

**33000
LUMENS**
Angle of light beam
160°



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



Easy to charge up the
battery pack
BATCELL 21700x8



Built-in red color led
enhances focusing
performance



45pcs XML LED to
provide 33000 lumens



Comes with ball joint
for easy system setup



Ergonomic aluminum
handle comes in a
package



Comes with
protective case
for VL 33000P II.

VL15000P PRO MINI TRI COLOR

Li ion Rechargeable Battery Super Power LED Video Light with Three Color Output



15000 LUMENS
Angle of light beam
160° wide beam

SPECIFICATIONS

Light source	32 x XML LED + 8 x XPE Red LED
Light output (Cool white mode)	3750 Lm (level I), 7500 Lm (level II) 15000 Lm (level III)
Light output (Warm white mode)	1500 Lm (level I), 3000 Lm (level II) 6000 Lm (level III)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	160° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	772 g (including battery)
Buoyancy in seawater	-313 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode, 1 level of brightness of Red color mode, and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650x7 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Built-in yellow color led enhances warmer color tone



Ergonomic aluminum handle comes in a package



FILFLUORO15000 Fluorodive filter for VL 15000P Pro Mini Tri Color. Sold separately.



Comes with ball joint for easy system setup



Comes with protective case for VL 15000P Pro Mini Tri Color.

VL15000^P PRO MINI

Li ion Rechargeable Battery Super Power
LED Video Light



**15000
LUMENS**
Angle of light beam
160° wide beam

SPECIFICATIONS

Light source	24 x XML LED + 8 x XPE Red LED
Light output	1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	757 g (including battery)
Buoyancy in seawater	-298 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 levels of brightness
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL I8650x7
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



24pcs XML LED
to provide
15000 lumens



Comes with
ball joint for
easy system
setup



Ergonomic
aluminum handle
comes in a
package



Comes with
protective case
for VL 15000P
Pro Mini.



FILFLUORO I5000
Fluorodive filter for
VL 15000P Pro Mini.
Sold separately.

VL10000_P

Li ion Rechargeable Battery High Power
LED Video Light



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output	1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2.5 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 25 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457g (including battery)
Buoyancy in seawater	-173g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL18650x4
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



Removable yellow
filter enhances
warmer color tone



Sturdy glove for
hands-free operation
underwater



Comes with ball joint
for easy system setup



Comes with
random color
outdoor dry bag

VL8000P TRI COLOR

Li ion Rechargeable Battery High Power LED
Video Light with Three Color Output



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output (Cool white mode)	2000 Lm (level I), 4000 Lm (level II) 8000 Lm (level III)
Light output (Warm white mode)	1000 Lm (level I), 2000 Lm (level II) 4000 Lm (level III)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	3 hrs (level III), 6 hrs (level II) and 12 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457 g (including battery)
Buoyancy in seawater	-173 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL I8650x4 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Built-in yellow color led enhances warmer color tone



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



Comes with random color outdoor dry bag

VL4200_P

Li ion Rechargeable Battery LED Video Light



Available in 3 colors

SPECIFICATIONS

Light source	6 x XML LED + 4 x XPE Red LED
Light output (Flood beam mode)	420 Lm (level I), 1050 Lm (level II) 2100 Lm (level III), 4200 Lm (level IV)
Light output (Red color mode)	200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 121.1 mm
Weight in air	318 g (including battery)
Buoyancy in seawater	-167 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Sturdy glove for hands-free operation underwater



4 levels of brightness for Flood beam mode, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



BATCELL 32650
Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Comes with ball joint for easy system setup



Removable yellow filter enhances warmer color tone



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Comes with random color outdoor dry bag

CB30000P

Li ion Rechargeable Battery Ultra Power
LED Video Light with High Color
Rendering Index



SPECIFICATIONS

Light source	COB LED + 10 x XPE Red LED
Light output	3000 Lm (level I), 7500 Lm (level II) 15000 Lm (level III), 30000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL26650x8
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 100 x L. 143.6mm
Weight in air	1759g (including battery)
Buoyancy in seawater	-668g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

**30000
LUMENS**
Angle of light beam
160° wide beam



4 levels of brightness
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL26650x8
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



COB LED
to provide
30000 lumens



Comes with ball
joint for easy
system setup



Ergonomic
aluminum handle
comes in a
package



Comes with
protective case
for CB30000P.

CB15000P

Li ion Rechargeable Battery Super Power
LED Video Light with High Color
Rendering Index



SPECIFICATIONS

Light source	COB LED + 8 x XPE Red LED
Light output	1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	776g (including battery)
Buoyancy in seawater	-317g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

**15000
LUMENS**
Angle of light beam
160° wide beam



4 levels of brightness
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL18650x7
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



COB LED
to provide
15000 lumens



Comes with
ball joint for
easy system
setup



Ergonomic
aluminum handle
comes in a
package



Comes with
protective case for
CB15000P.



FILFLUORO15000
Fluorodive filter for
CB15000P.
Sold separately.

CB10000P

Li ion Rechargeable Battery High Power
LED Video Light with High Color
Rendering Index



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	654g (including battery)
Buoyancy in seawater	-273g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL 21700x4
Li ion Rechargeable
Battery



Snoot 63
Snoot connector for
CB 10000P.
Sold separately.



Built-in red color led
enhances focusing
performance



Sturdy glove for
hands-free operation
underwater



Comes with ball joint
for easy system setup



Comes with
random color
outdoor dry bag

CB6500P

Li ion Rechargeable Battery High Power
LED Video Light with High
Color Rendering Index



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	650 Lm (level I), 1625 Lm (level II) 3250 Lm (level III), 6500 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	653g (including battery)
Buoyancy in seawater	-272g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL 21700x4
Li ion Rechargeable
Battery



Snoot 63
connector for
CB6500P.
Sold separately.



Built-in red color led
enhances focusing
performance



Sturdy glove for
hands-free operation
underwater



Comes with ball joint
for easy system setup



Comes with
random color
outdoor dry bag

VTL8000P MAX

Li ion Rechargeable Battery High Power
LED Video / Tech Light



120°
Wide beam
10°
Narrow beam

SPECIFICATIONS

Light source	13 x LED + 6 x XPE Red LED
Light output (Flood beam mode)	2000 Lm (level I) 4000 Lm (level II), 8000 Lm (level III)
Light output (Spot beam mode)	650 Lm (level I) 1300 Lm (level II), 2600 Lm (level III)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level III), 6 hrs (level II) and 12 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63x L 150.3mm
Weight in air	548g (including battery)
Buoyancy in seawater	-203g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



Angle of light beam



Built-in red color
led enhances
focusing
performance



3 Levels of brightness for Flood
beam mode, 3 levels of brightness
for Spot beam mode and 1 level
of brightness for Red color
mode controlled by a reliable
push button design



Removable yellow
filter enhances
warmer color
tone



Sturdy glove for
hands-free operation
underwater



Comes with ball
joint for easy
system setup



BATCELL I8650x4
Li ion Rechargeable
Battery



Comes with
random color
outdoor dry bag

8000
lumens

VTL8000P Backmount

Li ion Rechargeable Battery High Power LED Video/
Tech Light with Battery Canister

SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	6 hrs (level IV), 12 hrs (level III) 24 hrs (level II) and 60 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 63x L. 106.5mm
Size (Canister)	Dia. 60 x L. 202mm
Weight in air (Light head)	317g
Weight in air (Canister)	975g
Buoyancy in seawater (Light head)	-101g
Buoyancy in seawater (Canister)	-384g
Switching system	Push button with battery indicator
Cable Length	1.2 meters
Front glass	Tempered optical glass



120°
Wide beam
10°
Narrow beam



Comes with
ball joint for
easy system
setup



BATCELLCANISTER
Li ion Rechargeable
Battery



Battery level
indicator built-in:
Blue color / Green
color / Red color /
Flash Red color



Built-in red color
led enhances
focusing
performance



Slim fit Goodman
handle with connector.
Comes in a package

SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	6 hrs (level IV), 12 hrs (level III) 24 hrs (level II) and 60 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 63x L. 106.5mm
Size (Canister)	Dia. 60 x L. 212mm
Weight in air (Light head)	317g
Weight in air (Canister)	1033g
Buoyancy in seawater (Light head)	-101g
Buoyancy in seawater (Canister)	-407g
Switching system	Push button with battery indicator
Cable Length	1.35 meters
Front glass	Tempered optical glass

120°
Wide beam
10°
Narrow beam

8000
lumens

VTL8000P Sidemount

Li ion Rechargeable Battery High Power LED Video/
Tech Light with Battery Canister



Removable yellow
filter enhances
warmer color
tone



Easy to charge
up the battery
BATCELLCAN-
ISTER



Angle of light
beam



Comes with
protective case
for VTL 8000P
Backmount /
Sidemount.



4 Levels of brightness for Flood
beam, 1 level for Spot beam and 1 level
for Red color controlled by a reliable
push button design

VTL8000P

Li ion Rechargeable Battery High Power
LED Video / Tech Light



120°
Wide beam
10°
Narrow beam



SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63x L. 150.3mm
Weight in air	548g (including battery)
Buoyancy in seawater	-203g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Angle of light beam



Built-in red color led enhances focusing performance



Removable yellow filter enhances warmer color tone



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



BATCELL18650x4 Li ion Rechargeable Battery



Comes with random color outdoor dry bag

VTL3800P

Li ion Rechargeable
Battery LED Video / Tech Light



120°
Wide beam
10°
Narrow beam



4 levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design



Sturdy glove for hands-free operation underwater



Removable yellow filter enhances warmer color tone



Built-in red color led enhances focusing performance



Angle of light beam



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Comes with ball joint for easy system setup



BATCELL 32650 Li ion Rechargeable Battery



Comes with random color outdoor dry bag

SPECIFICATIONS

Light source	7 x XML LED + 2 x XPE Red LED
Light output (Flood beam mode)	380 Lm (level I), 950 Lm (level II) 1900 Lm (level III), 3800 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.5 x L. 140.6 mm
Weight in air	432 g (including battery)
Buoyancy in seawater	-205 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

VTL2600P

Li ion Rechargeable Battery LED Video / Tech Light



100°
Wide Beam
10°
Narrow Beam



4 levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design



Sturdy glove for hands-free operation underwater



Removable yellow filter enhances warmer color tone



Built-in red color led enhances focusing performance



Angle of light beam



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Comes with ball joint for easy system setup



BATCELL 32650 Li ion Rechargeable Battery



Comes with random color outdoor dry bag

Available in 3 colors

SPECIFICATIONS

Light source	7 x LED + 2 x XPE Red LED
Light output (Flood beam mode)	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Spot beam mode)	1000 Lm
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	100° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 128.7 mm
Weight in air	339 g (including battery)
Buoyancy in seawater	-177 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

TL8000_P

Li ion Rechargeable Battery Super
Power LED Tech Light

8000
lumens



SPECIFICATIONS

Light source	8 x LED
Light output	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 72 x L. 143.8 mm
Weight in air	787 g (including battery)
Buoyancy in seawater	-293 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL18650x7
Li ion Rechargeable
Battery



Ergonomic aluminum
handle comes in a
package



Slim fit Goodman
handle with connector.
Comes in a package



Comes with
random color
outdoor dry bag

TL4800P Backmount

Li ion Rechargeable Battery High Power LED
Tech Light with Battery Canister



SPECIFICATIONS

Light source	4 x XML LED
Light output	480 Lm (level I), 1200 Lm (level II) 2400 Lm (level III), 4800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 72 x L. 88.3mm
Size (Canister)	Dia. 60 x L. 202mm
Weight in air (Light head)	380g
Weight in air (Canister)	975g
Buoyancy in seawater (Light head)	-134g
Buoyancy in seawater (Canister)	-384g
Switching system	Push button with battery indicator
Cable Length	1.2 meters
Front glass	Tempered optical glass



SPECIFICATIONS

Light source	4 x XML LED
Light output	480 Lm (level I), 1200 Lm (level II) 2400 Lm (level III), 4800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 72 x L. 88.3mm
Size (Canister)	Dia. 60 x L. 212mm
Weight in air (Light head)	380g
Weight in air (Canister)	1033g
Buoyancy in seawater (Light head)	-134g
Buoyancy in seawater (Canister)	-407g
Switching system	Push button with battery indicator
Cable Length	1.35 meters
Front glass	Tempered optical glass



TL4800P Sidemount

Li ion Rechargeable Battery High Power LED
Tech Light with Battery Canister



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELLCANISTER
Li ion Rechargeable
Battery



Slim fit Goodman
handle with connec-
tor. Comes in
a package



Easy to charge up
the battery
BATCELLCANISTER



Comes with
protective case
for TL 4800P
Backmount /
Sidemount.

TL4800_P

Li ion Rechargeable Battery High Power LED Tech Light



SPECIFICATIONS

Light source	4 x XML LED
Light output	480 Lm (level I), 1200 Lm (level II) 2400 Lm (level III), 4800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 72 x L. 150.3mm
Weight in air	596 g (including battery)
Buoyancy in seawater	-222 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness and SOS controlled by a reliable push button design



BATCELL I8650x4 Li ion Rechargeable Battery



Sturdy Goodman Glove for handy Tech-dive operation



Ergonomic aluminum handle comes in a package



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.



Comes with random color outdoor dry bag

TL3500P SUPREME

Li ion Rechargeable Battery
LED Tech Light



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color

SPECIFICATIONS

Light source	3 x XML LED
Light output	350 Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4SUPREME
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 63x L. 119 mm
Weight in air	517 g (including battery)
Buoyancy in seawater	-221 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Ergonomic aluminum
handle comes in a
package



BATCELL18650x4 SUPREME
Li ion Rechargeable
Battery



Goodman handle
with connector or
Slim fit Goodman
handle with connector.
Sold separately.



Sturdy Goodman Glove
for handy Tech-dive
operation



Comes with
random color
outdoor dry bag

TL3500P

Li ion Rechargeable Battery
LED Tech Light



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color

SPECIFICATIONS

Light source	3 x XML LED
Light output	350 Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 63x L. 135.6 mm
Weight in air	447 g (including battery)
Buoyancy in seawater	-217 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Ergonomic aluminum
handle comes in a
package



BATCELL 32650 Li ion
Rechargeable Battery



Goodman handle
with connector or
Slim fit Goodman
handle with connector.
Sold separately.



Sturdy Goodman Glove
for handy Tech-dive
operation



Comes with
random color
outdoor dry bag

TL2600_P

Li ion Rechargeable Battery
LED Tech Light



Available in 3 colors



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color

SPECIFICATIONS

Light source	3 x LED
Light output	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 50x L. 130 mm
Weight in air	359 g (including battery)
Buoyancy in seawater	-188 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Ergonomic aluminum
handle comes in a
package



Goodman handle
with connector or
Slim fit Goodman
handle with
connector. Sold
separately.



BATCELL 32650 Li ion
Rechargeable Battery



Sturdy Goodman Glove
for handy Tech-dive
operation



Comes with
random color
outdoor dry bag

LIGHT HEAD



BLACK MOLLY V AL2600 XWP II



Available in 2 colors

SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED
Light output	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8 mm
Weight in air	218 g (including battery)
Buoyancy in seawater	-105 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL26650 Li ion Rechargeable Battery



Protective case for AL 2600XWP II and Single Arm Tray. Sold separately.



4 levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



Removable yellow filter enhances warmer color tone



Comes with ball joint for easy system setup



Protective case for AL 2600XWP II. Sold separately.



Comes with random color outdoor dry bag

BLACK MOLLY IV AL1800 XWP II TRI COLOR



Available in 2 colors

SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED
Light output (Cool white mode)	450Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Warm white mode)	450Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8 mm
Weight in air	218 g (including battery)
Buoyancy in seawater	-105 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL26650 Li ion Rechargeable Battery



Protective case for AL 1800XWP II and Single Arm Tray. Sold separately.



3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



Removable yellow filter enhances warmer color tone



Comes with ball joint for easy system setup



Protective case for AL 1800XWP II. Sold separately.



Comes with random color outdoor dry bag

AL1800_{NP}



Available in 2 colors



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Comes with random color outdoor dry bag



4 Levels of brightness and SOS controlled by a reliable push button design



BATCELL26650 Li ion Rechargeable Battery

SPECIFICATIONS

Light source	3 x LED
Light output	180Lm (level I), 450Lm (level II), 900 Lm (level III), 1800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III), 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 47 x L. 133.5 mm
Weight in air	257 g (including battery)
Buoyancy in seawater	-130 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

RGB_{White II}

Li ion Rechargeable Battery
4 Colors LED Light



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 colors of light and SOS controlled by a reliable push button design



Built-in red color Led



Comes with the clip for easy system setup



Built-in green color Led



Snoot Connector for RGB White II. Sold separately.



Built-in blue color Led



BATCELL 18650 Li ion Rechargeable Battery



Comes with random color outdoor dry bag

SPECIFICATIONS

Light source	LED
Light output	500 Lm (white), 120 Lm (red) 40 Lm (blue), 300 Lm (green)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included

AL1200NP Tail II

Li ion Rechargeable Battery Narrow Beam LED Light with Tail Switch Button



1200 lumens



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Protective case for AL 1200NP Tail II. Sold separately.



Our light can fit in glove or pouch. Sold separately.



FILREDNP Red filter for AL1200NP Tail II. Sold separately.



BATCELL 18650 Li ion Rechargeable Battery



Comes with random color outdoor dry bag

SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 33.2 x L. 152.2 mm
Weight in air	189 g (including battery)
Buoyancy in seawater	-87 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

AL1200WP Tail II

Li ion Rechargeable Battery Wide Beam LED Light with Tail Switch Button



1200 lumens



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Comes with the clip for easy system setup



Snoot connector for AL1200WP Tail II. Sold separately.



Our light can fit in glove or pouch. Sold separately.



FILYEL 35 FILRED 35
Removable red and yellow filters enhances focusing performances and warm color tone



Protective case for AL 1200WP Tail II. Sold separately.



BATCELL 18650 Li ion Rechargeable Battery



Comes with random color outdoor dry bag

SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 137.7 mm
Weight in air	177 g (including battery)
Buoyancy in seawater	-88 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included

AL1200NP II

Li ion Rechargeable Battery
Narrow Beam LED Light



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Protective case for AL 1200NP II. Sold separately.



Our light can fit in glove or pouch. Sold separately.



FILREDNP Red filter for AL 1200NP II. Sold separately.



BATCELL 18650 Li ion Rechargeable Battery



Comes with random color outdoor dry bag

SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 33.2 x L. 139.8 mm
Weight in air	168 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

AL1200WP II

Li ion Rechargeable Battery
Wide Beam LED Light



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Comes with the clip for easy system setup



FILYEL 35 FILRED 35 Removable red and yellow filters enhances focusing performances and warm color tone



Our light can fit in glove or pouch. Sold separately.



Snoot Connector for AL 1200WP II. Sold separately.



Protective case for AL 1200WP II. Sold separately.



BATCELL 18650 Li ion Rechargeable Battery



Comes with random color outdoor dry bag

SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included

AL1200_{XWP II}

Li ion Rechargeable Battery Extra
Wide Beam LED Light



Battery level indicator
built-in: Blue color /
Green color / Red color /
Flash Red color



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Comes with the clip
for easy system setup



FILYEL 35 FILRED 35
Removable red and
yellow filters enhances
focusing performances
and warm color tone



Our light can fit in
glove or pouch. Sold
separately.



Snoot Connector for
AL1200XWP II.
Sold separately.



Protective case for
AL1200XWP II.
Sold separately.



BATCELL 18650 Li ion
Rechargeable Battery



Comes with
random color
outdoor dry bag

SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 122.1 mm
Weight in air	160 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

AL1100_{RAFO II}

Li ion Rechargeable Battery
Wide Beam LED Light with
Auto-Flash Off Function



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Comes with ball joint
for easy system setup



Automatic Flash Off
Function AFO interval:
0.2 sec. +/- 0.1 sec.



Built-in red color
led enhances
focusing
performance



BATCELL 18650 Li ion
Rechargeable Battery



Comes with
random color
outdoor dry bag

SPECIFICATIONS

Light source	XML LED + 2 x XPE Red LED
Light output	110 Lm (level I), 275 Lm (level II) 550 Lm (level III), 1100 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	55° wide beam
Color temperature	6500K
AFO interval	0.2sec. +/- 0.1 sec.
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 42.4 x L. 128.3 mm
Weight in air	242 g (including battery)
Buoyancy in seawater	-129 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

AL450^{WM} Tail

LED Aluminum Diving Light with Tail Switch Button

450
lumens



Push on / off button on the bottom



3xAAA stand-alone battery holder



AL 450WM Tail LED with Glove



AL 450WM Tail LED with Pouch



AL 450WM Tail LED with Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.36 x L.122.6mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 40°
- Up to 4hrs of burn time
- Lanyard included
- 160g (including batteries) weight in air
- -74g (including batteries) buoyancy in seawater
- Switching System : Push Button

AL450^{NM} Tail Spotter

Narrow Beam Aluminum LED Light with Tail Switch Button

450
lumens



Push on / off button on the bottom



3xAAA stand-alone battery holder



AL 450NM Tail LED with Glove



AL 450NM Tail LED with Pouch



AL 450NM Tail LED with Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.42 x L.125.4mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 8°
- Up to 4hrs of burn time
- Lanyard included
- 185g (including batteries) weight in air
- -79g (including batteries) buoyancy in seawater
- Switching System : Push Button

AL250

Multi-Function Aluminum LED Light

250
lumens



SPECIFICATIONS

Light source	1 x XPG LED
Light output	250 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	2xAA alkaline or Ni-MH batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	Up to 2 hrs
Maximum depth	100 m tested
Size	Dia. 28x L. 147.8 mm
Weight in air	135 g (including battery)
Buoyancy in seawater	-85 g (including battery)
Front glass	Tempered optical glass
Lanyard	Included



Light is suitable for multi-function



Operate with 2xAA
batteries



Our light can fit in
glove or pouch. Sold
separately.



Available in 5 colors

EASY CLIP Rainbow Color Light

SPECIFICATIONS

- Available fifteen color output –
Red, Green, Orange, Blue, Purple, Yellow, Light Blue, Flash red,
Flash green, Flash orange, Flash blue, Flash purple, Flash yellow,
Flash light blue automatically run all fourteen modes.
- 12-24 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater



EASY CLIP Light with Flash

SPECIFICATIONS

- Available six color output –
Blue, Red, Green, Flash Blue, Flash Red, Flash Green,
- Up to 36 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater



CF1200P II

Li ion Rechargeable Battery
Changeable Focus LED Light



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	7° narrow beam to 37° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 169.3mm
Weight in air	245 g (including battery)
Buoyancy in seawater	-121 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Twist the front to
change the focus
(Turning force
increases with depth)



BATCELL 18650 Li ion
Rechargeable Battery



Comes with
random color
outdoor dry bag

CF450 II



Available in 2 colors

SPECIFICATIONS

Light source	Cree LED
Light output	450 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	3xAAA alkaline or Ni-MH batteries
Angle of light beam	7° to 37°adjustable
Color temperature	6500K
Burn time	Up to 4hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 131.9mm
Weight in air	216 g (including batteries)
Buoyancy in seawater	-104 g (including batteries)
Switching system	Magnetic Swivel
Front glass	Tempered optical glass & Convex Lens
Lanyard	Included



Twist the front to change
the focus (Turning force
increases with depth)



Magnetic Swivel Switch
allows for one hand
operation



CF 450 II LED with
Glove



3xAAA stand-alone
battery holder



CF 450 II LED with
Pouch



CF 450 II LED
with Pouch and Glove

HL1000N

1000 lumens

Li ion Rechargeable Battery
Narrow Beam LED Head Light



FILREDHLN Red filter for HL 1000N.
Sold separately.



SPECIFICATIONS

Light source	Cree LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL18650
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41mm
Weight in air	205 g (including battery)
Buoyancy in seawater	-74 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

HL450N

450 lumens

Narrow Beam LED
Head Light



FILREDHLN Red filter for HL 450N.
Sold separately.



SPECIFICATIONS

Light source	Cree LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41mm
Weight in air	187 g (including batteries)
Buoyancy in seawater	-56 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of
brightness
and SOS controlled
by a reliable push
button design



BATCELL18650
Li ion
Rechargeable
Battery



Battery level
indicator built-in:
Blue color /
Green color / Red
color / Flash Red
color



4 levels of
brightness
and SOS controlled
by a reliable push
button design



3 x AAA
alkaline
batteries



Battery level
indicator
built-in: Blue color /
Green color / Red
color / Flash Red
color

HL1000xw



Li ion Rechargeable Battery
Extra Wide Beam LED Head Light



Built-in red color led enhances
focusing performance



SPECIFICATIONS

Light source	2 x Cree LED +2 x XPE Red LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL18650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8mm
Weight in air	207 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

HL450xw



Extra Wide Beam LED
Head Light




Built-in red color led enhances
focusing performance



SPECIFICATIONS

Light source	2 x Cree LED +2 x XPE Red LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8 mm
Weight in air	189 g (including batteries)
Buoyancy in seawater	-58 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

Green Spot light RED Spot light

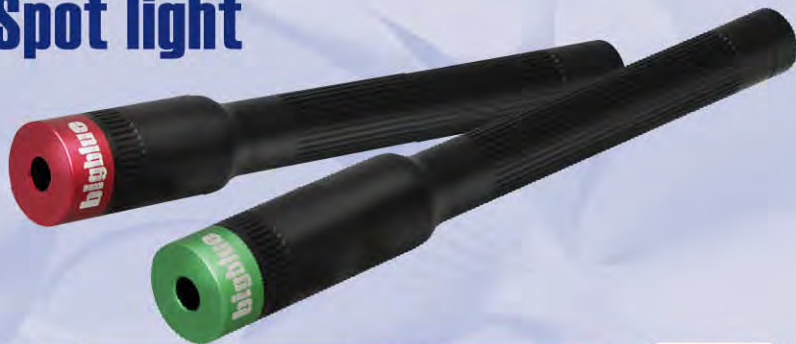

SPECIFICATIONS	GREEN SPOT LIGHT	RED SPOT LIGHT
Light source	: Green Laser	Red Laser
Light output	: Below 1 mW	Below 1 mW
Casing material	: Aluminum alloy.	Aluminum alloy.
	: Anti-corrosive anodized	Anti-corrosive anodized
Power source	: 2 x AAA alkaline or Ni-MH batteries	2 x AAA alkaline or Ni-MH batteries
Wavelength	: 520nm	650nm
Burn time	: Up to 12 hrs	Up to 12 hrs
Maximum depth	: 100 m tested	100 m tested
Size	: Dia. 19 x L. 168.6 mm	Dia. 19 x L. 154.1 mm
Weight in air	: 89 g (including batteries)	82 g (including batteries)
Buoyancy in seawater	: -54 g (including batteries)	-51 g (including batteries)
Switching system	: Twisting Bezel	Twisting Bezel
Front glass	: Tempered optical glass	Tempered optical glass
Lanyard	: Included	Included



Operate with
2 x AAA batteries



CLIPMNTSPOT
Mounting clip for Green
Spot Light and Red Spot
Light. Sold separately.

Protective Case Series



Model :	PC101 A	PC102 A	PC103 A	PC104 A	PC105 A	PC106 A
Outer Dimension :	225 x 180 x 100 mm	350 x 270 x 120 mm	340 x 310 x 120 mm	360 x 285 x 190 mm	420 x 360 x 130 mm	420 x 360 x 190 mm
Inner Dimension :	200 x 135 x 85 mm	325 x 210 x 110 mm	310 x 250 x 107 mm	330 x 270 x 175 mm	380 x 310 x 120 mm	380 x 310 x 180 mm

FLUORODIVE Kit sets

Science has discovered corals contain Fluorescent Proteins invisible to the naked eye that jump into view using innovative high-intensity fluorolights and filters.

Bigblue Fluorodive Kits provide everything you need to experience this incredibly beautiful effect. You get specially designed filters to precisely match the coral fluorescence wavelength, and yellow blue-barrier filters to increase the intensity of the colors emitted by the corals. Our innovative design is the only one that allows you to easily switch between blue and white light to accommodate changes in dive conditions.

These kits are suitable for night divers, resorts, science institutions, ecological monitoring groups and specialty photographers.

Truly there is nothing that can match the beauty of witnessing coral fluorescence on your next night dive!




Photos of the fluorescence stimulated
by the specific wavelength and captured
through a barrier filter

FDK35	CF450 II / CF1200P II / AL1200WP II / AL1200XWP II / AL1200WP Tail II / BLACK MOLLY IV / BLACK MOLLY V Fluorodive Kit
FDK38	CF450 / CF1200P / AL1200WP / AL1200XWP / AL1200WP Tail / BLACK MOLLY II / BLACK MOLLY III Fluorodive Kit
FDK44	VL4200P / VTL2600P Fluorodive Kit
FDK55	VTL3800P / VL10000P / VL10000PRC VL8000P Tri Color Fluorodive Kit
FDK63	CB6500P / CB10000P / VTL8000P VTL8000P Max / CB10000PRC Fluorodive Kit



Camera Filters

Camera filters are available for you to capture the macro or wide angle photos or videos of the memorable aquatic creatures.

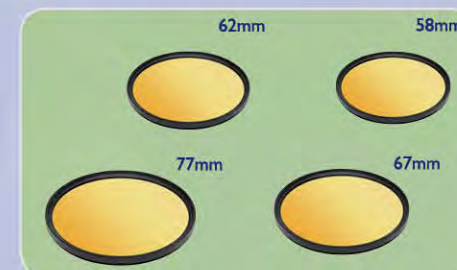

FILEFLUOR015000

Fluorodive filter for VL 15000P Pro Mini / VL 15000P Pro Mini Tri Color / CB15000P / VL 15000PRC / CB 15000PRC



COMBO PACK SERIES

AL 450 NM Tail Spotter
Narrow Beam Aluminum LED Light with
Tail Switch Button

AL 1200NP II
Li ion Rechargeable Battery Narrow
Beam LED Light

Easy Clip Rainbow Color light



AL 450 WM Tail
LED Aluminum Diving Light with
Tail Switch Button

AL 1200NP II
Li ion Rechargeable Battery Narrow
Beam LED Light

Easy Clip Rainbow Color light



AL 450 NM Tail Spotter
Narrow Beam Aluminum LED Light with
Tail Switch Button

AL 1200WP II
Li ion Rechargeable Battery Wide
Beam LED Light

Easy Clip Rainbow Color light



AL 450 WM Tail
LED Aluminum Diving Light with
Tail Switch Button

AL 1200WP II
Li ion Rechargeable Battery Wide
Beam LED Light

Easy Clip Rainbow Color light



AL 250
Multi-Function Aluminum LED Light

AL 1200NP II
Li ion Rechargeable battery
Narrow Beam LED Light

Easy Clip Rainbow Color light



AL 250
Multi-Function Aluminum LED Light

AL 1200WP II
Li ion Rechargeable battery
Wide Beam LED Light

Easy Clip Rainbow Color light



CAMERA TRAY 27



Camera Tray 27 with 27cm long tray.
Two 1" Ball joint arms with no-slip grip.
Compatible with Olympus TG4/TG5 Housings.

BBGPTray

Go Pro Tray



Go Pro Hot Shoe Adapter



Go Pro Light
Adaptor



Go Pro Kit sets

GP4200 Kit

- 1 pc. of Double Clip (CLP02)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Light not included



GP450 Kit

- 2 pcs. of Mounting Clip (CLIPMINTCF)
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



GP1200 Kit

- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



Protective Case for Go Pro Tray Kit Set

- 1 pcs. of ALI200WP II
- 1 pcs. of ALI200XWP II
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)



EXTENDGPTRAY

Extendable Go Pro Tray



SINGLEARMTRAY

Single Arm Go Pro Tray

FLEXIGPTRAY

7" Flexi Arm
Go Pro Tray



FLEXISINGLEARMTRAY

7" Flexi Arm Single Arm Tray




FLEXIEXTENDGPTRAY

7" Flexi Arm Extendable
Go Pro Tray



TRIPOD PLATE

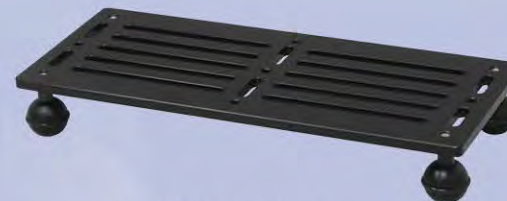

Size:W.112 x L.272mm
Comes with four 1" Ball joint



Easy assemble with double clip and arms.
Double clip and arms sold separately.

Batteries & Chargers



BATCELL18650

Battery for AL1200NP II / AL1200WP II / AL1200XWP II / AL1200NP Tail II / AL1200VP Tail II / CF1200P II / AL1100RAFO II / HL1000XW / HL1000N / RGB White II / AL1200PNP IR / AL1200PWP IR



BATCELL26650

Battery for Black Molly IV / Black Molly V / Black Molly VB / AL1800NP



BATCELL32650

Battery for VL4200P / VTL3800P / TL3500P / VTL2600P / TL2600P / VL4200PB




CR2032

Battery for Easy Clip Light / Controller




BATCELL18650x4

Battery for VL10000P / VTL8000P / VTL8000P Max / TL4800P / VL8000P Tri Color / VL10000PB / VL10000PRC



BATCELL21700x4

Battery for CB6500P / CB10000P / CB6500PB / CB10000PRC



BATCELL18650x7

Battery for VL15000P Pro Mini / VL15000P Pro Mini Tri Color / CB15000P / TL8000P / VL15000PB / VL15000PRC / CB15000PRC



BATCELLCANISTER

Battery for TL4800P Backmount / Sidemount / VTL8000P Backmount / Sidemount




BATCELL18650x4SUPREME

Battery for TL3500P Supreme




BATCELL21700x8

Battery for VL33000P II



BATCELL26650x8

Battery for CB30000P



BATCELL60000

Battery for VL60000P



BATCHR26650x8

Charger for CB30000P



BATCHR60000

Charger for VL60000P



BATCHR18650x4

Charger for VL10000P / VTL8000P / TL4800P / VL8000P Tri Color / VTL8000P Max / VL10000PB / VL10000PRC



BATCHR21700x4

Charger for CB6500P / CB10000P / CB6500PB / CB10000PRC



BATCHR18650x4 SUPREME

Charger for TL3500P Supreme



BATCHR21700x8

Charger for VL33000P II



BATCHR18650x7

Charger for VL15000P Pro Mini / VL15000P Pro Mini Tri Color / CB15000P / TL8000P / VL15000PB / VL15000PRC / CB15000PRC

Batteries & Chargers



BATCHR32650/26650

Charger for VL4200P / VTL3800P / TL3500P / Black Molly IV / Black Molly V / VTL2600P / TL2600P / VL4200PB / Black Molly VB / AL1800NP



BATCHRCANISTER

Charger for TL4800P Backmount / Sidemount / VTL8000P Backmount / Sidemount



BATCHR18650

Charger for AL1200NP II / AL1200WP II / AL1200XWP II / AL1200NP Tail II / AL1200VP Tail II / CF1200P II / AL1100RAFO II / HL1000XW / HL1000N / RGB White II / AL1200NP IR / AL1200PWP IR

Accessories



AF 55

Ambient filter for VL10000P / VL10000PB / VL10000PRC / VL8000P Tri Color



AF 63

Ambient filter for CB6500P / CB9000P / CB10000P / CB10000PRC



AF 70

Ambient filter for VL15000P Pro Mini / VL15000P Pro Mini Tri Color / CB15000P / VL15000PRC / VL15000PB / CB15000PRC



Optical Fibre

Optical fibre for VL15000PRC / CB15000PRC / VL10000PRC / CB10000PRC



Controller

Remote Control for VL15000PRC / CB15000PRC / VL10000PRC / CB10000PRC



TLGGLOVE

Goodman glove for any light with a two-prong mounting square



NPGGLOVEM

Neoprene glove for Mini Light



NPGGLOVE


Neoprene glove for AL1200NP II / AL1200WP II / AL1200XWP II / AL1200NP Tail II / AL1200VP Tail II / AL1200NP IR / AL1200PWP IR

Accessories




PISTOLGRIPHANDLE

Pistol Grip Handle for any light with a two-prong mounting square



GHA-01C

Goodman handle with connector for any light with a two-prong mounting square




SFGHA-01C

Slim Fit Goodman handle with connector for any light with a two-prong mounting square



LANTHANDLE

Lantern style handle



FILFLUORO15000

Fluorodive filter for CB15000P / VL15000P Pro Mini / VL15000P Pro Mini Tri Color / VL15000PRC / CB15000PRC



FDMASKYL

Yellow filter for Fluorodiving



SNOOT 35

Snoot Connector for AL1200WP II / AL1200XWP II / AL1200WP Tail II / RGB White II



SNOOT 38

Snoot Connector for AL1200WP / AL1200XWP / AL1200WP Tail / RGB White



SNOOT 55

Snoot Connector for VL6000P



SNOOT 63

Snoot Connector for CB6500P / CB10000P / CB6500PB / CB10000PRC



FILRED35

Red filter for AL1200WP II / AL1200XWP II / AL1200WP Tail II



FILREDSM

Red filter for AL1200WP / AL1200XWP / AL1200WP Tail



FILREDNP

Red filter for AL1200NP II / AL1200NP Tail II



FILREDHLN

Red filter for HL1000N / HL450N



FILYELLG

Yellow filter for VTL3800P / VL10000P / VL10000PB / VL10000PRC



FILYEL35

Yellow filter for AL1200WP II / AL1200XWP II / AL1200WP Tail II / Black Molly V / Black Molly VB



FILYEL44

Yellow filter for VL4200P / VL4200PB / VTL2600P



FILYEL63

Yellow filter for VTL8000P / VTL8000P Backmount / Sidemount / VTL8000P Max



FILYELSM

Yellow filter for AL1200WP / AL1200XWP / AL1200WP Tail / Black Molly III



CLIPMNTSPOT

Mounting clip for Green Spot Light / Red Spot Light



CLIPMNTAL

Mounting clip for AL1200VWP II / AL1200XWP II / CF1200P II / AL1200WP IR



CLIPMNTCF

Mounting clip for CF450 II / AL450VWM Tail / AL1200WP Tail II



GO PRO MOUNT

Go Pro Mount for Go Pro Camera



1" BALL JOINT

1" Ball Joint fit for any light with a two-prong mounting square



SPRING CORD

Length : 330mm



EASY RELEASE MOUNT

Easy Release Mount fit for helmet / DPV



NPHOODMS

Neoprene hood for one light holster



NPHOODMD

Neoprene hood for two light holster



NPRPOUCH

Neoprene pouch with retractor for AL1200NP II / AL1200VWP II / AL1200NP Tail II / AL1200VWP Tail II / AL1200NP IR / AL1200WP IR



NPRPOUCHM

Neoprene pouch with retractor for Mini Light

Accessories

Outdoor Dry Bags



3L	5L	7L	15L	20L
Dia. 140 x L. 330 mm	Dia. 170 x L. 380 mm	Dia. 180 x L. 510 mm	Dia. 240 x L. 540 mm	Dia. 240 x L. 600 mm
Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 6 colors Yellow, Green, Pink, Light Blue, Blue, Black	Available in 5 colors Yellow, Green, Blue, Black, Orange	Available in 5 colors Yellow, Green, Blue, Black, Orange

Easy Release Mount Series



Easy Release
Glove



Easy Release
Goodman Handle



Easy Release
GoPro
Mount Glove



Easy Release
Slim Fit
Goodman Handle

Photo/Video Arms & Accessories

Float Arms Series




9" Float Arm

Dia. 70 x 228mm
Weight above water : 281g
Buoyancy lift : 360g



9" Jumbo Float Arm

Dia. 90 x 228mm
Weight above water : 349g
Buoyancy lift : 697g



13" Float Arm

Dia. 70 x 330mm
Weight above water : 430g
Buoyancy lift : 612g

Flexi Arms Series



7" Flexi Arm



9" Flexi Arm



6" Flexi Arm
Hot Shoe YS Adapter



6" Flexi Arm
Hot Shoe Ball Adapter



YS Adapter

Photo/Video Arms & Accessories

Clips

- Made of T6061 grade aluminum
- Available in 2 versions: double clip and a triple clip
- Ergonomic handle makes it easy to twist on and off




CLP 02 Double clip

CLP 03 Triple clip

Arms

- Full T6061 grade aluminum
- Available in 4 lengths: 5", 8", 12", 16"

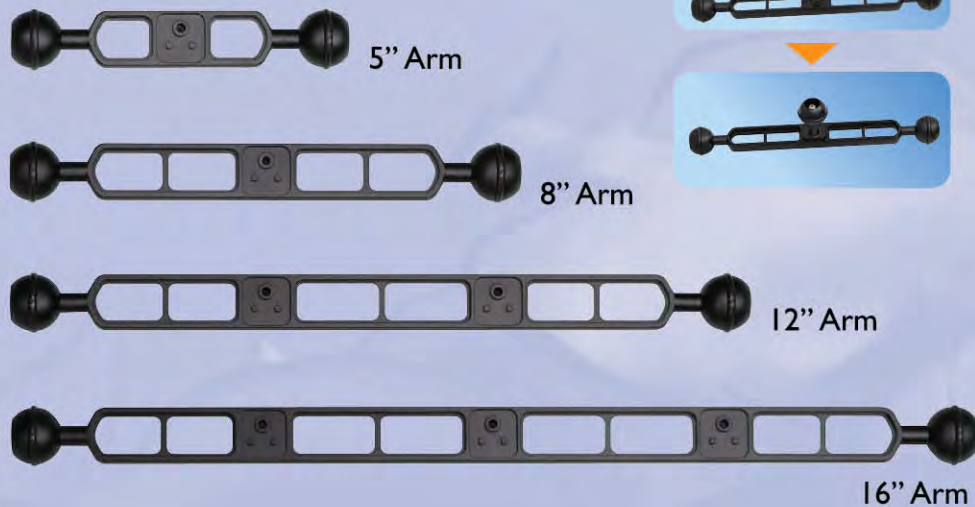

DA Series



Specifications subject to change without prior notice.

Our Distributors & Dealers



Aruba / Bonaire / Curacao Distributor : Palm Trading Bonaire NV

Contact Person : Joyce Sonneveld
E-mail : sales@palmtradingnv.com
Phone : 599 717 2072
Mail : Hanchi Ambolina 5, Kralendijk
Bonaire Dutch Caribbean



Australia Distributor : Adreno

Contact Person : Robbie Lewis
E-mail : robbie@adreno.com.au
Phone : 61-07-3391-2299
Mail : 54-58 Deshon Street, Woolloongabba,
Brisbane, QLD 4102, Australia



Austria Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel, France



Belgium/ Netherlands / Luxembourg Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel, France



Brazil Distributor : Seasub

Contact Person : Pablo Y. Varela
E-mail : pablo@seasub.com.br
Phone : 55-11-38328342
Mail : Rua Baumann, 1039/1051,
Cep 05318000,
Sao Paulo, Brazil



Canada Distributor : Pacific Scuba Industries

Contact Person : Michael Joseph &
Laura Valente
E-mail : laurabigblue@outlook.com
Phone : 778-245-1962
Mail : 31519 Southern Dr, Abbotsford,
BC V2T5P1, Canada



Czech Republic Distributor : Olson S.R.O

Contact Person : Sales Office
E-mail : olson@olson.cz
Phone : 420 220 805 300
Mail : Bubenske Nabrezi 306/16,
Holesovicka Trznice – Hala 16
170 00, Prague 7
Czech Republic



France / Europe Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel, France



Germany Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel, France



Greece / Croatia Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel, France



Indonesia Distributor : Divesea Indonesia

Contact Person : Chatra Hapsoro
E-mail : bigblue.id@gmail.com
Phone : 62-82145490450
Mail : Metro Park Residence, Unit MA-LG-05,
JL. Pilar Mas Utama Raya Kav 28,
Kebon Jeruk, Jakarta Barat 11520 Indonesia



Italy/ Malta Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel, France



Japan Distributor : Zero Co., Ltd.

Contact Person : Katsuhiko Saotome
E-mail : zero@zero-zero.co.jp
Phone : 81-3-5721-1906
Fax : 81-3-5721-1910
Mail : 1-11-5 Takaban, Meguro-Ku,
Tokyo, Japan



Korea Distributor : King Sports

Contact Person : Mr. Chang / Yun Hee Chang
E-mail : kingdive@kingsports.co.kr
Phone : 82-2-3628251
Mail : 35-4, 1GA, Manri-Dong, Chung-Gu,
Seoul, Korea



Kuwait Dealer : Ilmunz Marine Co.

Contact Person : Abdulrahman Al-Serheed
E-mail : ilmunz@ilmunz.com
Phone : +965 95500969
Mail : Creative Design Center, Block 1, Street 10,
Building 63, Store 2.2,
Shuwaikh Industrial 1, Kuwait



Malaysia Distributor : Rainbow Runner Sdn Bhd

Contact Person : Sim
E-mail : ops@rainbowrunner.net
Phone : 60-341-622837
Fax : 60-341-617837
Mail : 5, Ukay Boulevard, Jalan Lingkaran
Tengah 2, Hulu Kelang, 68000 Ampang,
Selangor, Malaysia



Maldives Dealer : Sea Gear

Contact Person : Hussien Abdulla
E-mail : sales@seagear.com.mv
Phone : +960 3302737
Mail : M. Araliya – Ground Floor – Alhivilaa Magu,
20292 Male, Maldives



Mexico Distributor : Comercializadora UNIF Sa De CV

Contact Person : Tristan Termat
E-mail : tristan@unifmexico.com.mx
Phone : +52 984 80 311 68
Mail : Calle 4 nte Mza 42 Lote 4-1 Local B Entre
25 y 30 Avenida Col. Centro Localidad :
Playa del Carmen, Q. Roo Municipio :
Solidaridad CP: 77710 Mexico



New Zealand Distributor : Sea Tech Ltd.

Contact Person : Dave Moran
E-mail : info@seatech.co.nz
Phone : 64-9-5210684
Mail : 47 Tautari St. Orakei. Auckland 1071,
New Zealand



Philippines Distributor : Dive Supply Subic, INC.

Contact Person : Rowena Merto
E-mail : muriel@aquaventurewhitetip.com
Phone : 63-2-708-9996
Mail : Office 6&7 EMS Building, 14th Street
Subic Gate Perimeter Road, Subic Bay
Freeport Zone, Olongapo City,
2222, Philippines



Poland Distributor : Waterfall

Contact Person : Darek
E-mail : darek@waterfall.pl
Phone : 48-600-340-002
Mail : UL. Klimczaka 22D/3, 02-797 Warszawa
Poland PL 7621470585



Scandinavian Distributor : AquaFun AB

Contact Person : Sales Office
E-mail : info@aquafun.se
Phone : 46-0-40-295-300
Mail : Sangleksgatan 4E, 215 79, Malmö,
Sweden



Singapore Distributor : DiveSea Pte Ltd

Contact Person : Fairuz Ahmad
E-mail : team@divesea.com.sg
Phone : 65-85115164
Mail : 3 Coleman Street, #02-15,
Peninsula Shopping Centre
Singapore 179804



South Africa Distributor : Manex & Power Marine

Contact Person : Gavin Jones
E-mail : gavin.jones@manex.co.za
Phone : 27-021-511-7292
Mail : 9 Paarden Eiland Road, Paarden Eiland,
South Africa



Spain/ Portugal Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : alastair@liquidsports.co.uk
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel, France



Switzerland Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel, France



Russia Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel, France



Taiwan Distributor : Indigo Blue Technology Co. Ltd.

Contact Person : Rachel Cheng
E-mail : rachel.cheng@weistech.com.tw
Phone : 886 2 82271619
Mail : 4F-6, No. 258 Lian Cheng Road,
Chung Ho Dist., New Taipei City 23553
Taiwan, ROC



Turkey Distributor : K Pro Doga Sporlari Malzemeleri Tic. Ltd. STI

Contact Person : Akin Kaftanoglu
E-mail : akinkaftanoglu@yahoo.com
Phone : 90-3124334479
Mail : Bulbulderesi Cad. No.: 23/A, Seyranbaglari,
Ankara, Turkey



U.A.E. Distributor : Senyar Marine Equipment

Contact Person : Abdulla Ai Kindi
E-mail : senyar7@gmail.com
Phone : 971-2-666-9999
Mail : P.O. Box 112790, Abu Dhabi, U.A.E.



United Kingdom / Ireland Distributor : Liquid Sports Ltd.

Contact Person : Alastair Ansell
E-mail : alastair@liquidsports.co.uk
Phone : 44-0-7585-935522
Mail : 11 Stag Lane, Berkhamsted,
Hertfordshire, HP4 1FJ, UK



Headquarters :

Bossk International Company Limited

Contact Person : Oscar Tong

E-mail : oscar@bigblue.com.hk

Phone : 852-3568-0773

Fax: 852-3998-3127

Mail : Room 818, 8/F, Po Yip Building, 23, Hing Yip

Street, Kwun Tong, Hong Kong

Website : www.bigbluelights.com

www.bigblue.com.hk

US Sales Office : BosskUSA / Bigblue Dive Lights

Contact Person : Tim Ratcliffe

E-mail : sales@bigbluedivelights.com

Phone : 727-442-2300

Fax: 727-499-7117

Mail : 1710N Hercules Ave, Suite 103, Clearwater,
FL 33765 USA

Visit Us
on website 



Like Us
on facebook 

